



**STRONG PARTNERS.
TOUGH TRUCKS.™**



HIGH CAPACITY FORKLIFT TRUCKS

H18-20XM-9, H18-20XMS-9

18 000 – 20 000 KG @ 900 MM



H18-20XM(S)-9

DISTINGUISHING MARKS	1.1	Manufacturer (abbreviation)	
	1.2	Manufacturer's type designation	
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas	
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker	
	1.5	Rated capacity / rated load	Q (t)
	1.6	Load centre distance	c (mm)
	1.8	Load distance, centre of drive axle to fork	
	1.9	Wheelbase	

WEIGHTS	2.1	Service weight ●	kg
	2.2	Axle loading, laden front / rear	kg
	2.3	Axle loading, unladen front / rear	kg

TYRES / CHASSIS	3.1	Tyres: L = pneumatic, V = cushion, SE = Pneumatic Shape Solid	
	3.2	Tyre size, front	
	3.3	Tyre size, rear	
	3.5	Number of wheels, front / rear (X = driven)	
	3.6	Tread, front	b ₁₀ (mm)
	3.7	Tread, rear	b ₁₁ (mm)

DIMENSIONS	4.1	Tilt of mast/fork carriage forward/backward	α / β (°)
	4.2	Height, mast lowered ○	h ₁ (mm)
	4.3	Free lift	h ₂ (mm)
	4.4	Lift ¶	h ₃ (mm)
	4.5	Height, mast extended	h ₄ (mm)
	4.7	Height of overhead guard / closed cabin	h ₅ (mm)
	4.7.1	Height of closed cabin w/o / with airco	h ₆ (mm)
	4.7.2	Height of overhead guard / closed cabin with strobe light	h ₅ (mm)
	4.7.3	Height of overhead guard / closed cab with work lights	h ₅ (mm)
	4.8	Seat height relating to SIP ●	h ₇ (mm)
	4.12	Coupling height	h ₁₀ (mm)
	4.19	Overall length	l ₁ (mm)
	4.20	Length to face of forks	l ₂ (mm)
	4.21.2	Overall width across all	b ₂ (mm)
	4.22	Fork dimensions ISO 2331	s/e/l (mm)
	4.23	Fork carriage type	
	4.24	Fork carriage width	b ₃ (mm)
	4.25	Distance over fork arms, minimum / maximum	b ₅ (mm)
	4.30	Sideshift @ width over forks	b ₆ / b ₅ (mm)
	4.31	Ground clearance, laden, below mast	m ₁ (mm)
	4.32	Ground clearance, centre of wheelbase	m ₂ (mm)
	4.33.1	Load dimension b ₁₂ × l ₆ crossways	b ₁₂ × l ₆ (mm)
	4.34.1.1	Aisle width for pallets 1830 × 1830 crossways without operating clearance	A _{ST} (mm)
	4.34.1.2	Aisle width for pallets 1830 × 1830 crossways with 200 mm operating clearance	A _{ST} (mm)
	4.34.1.3	Aisle width for pallets 1830 × 1830 crossways with 10% operating clearance	A _{ST} (mm)
	4.33.2	Load dimension b ₁₂ × l ₆ crossways	b ₁₂ × l ₆ (mm)
	4.34.2.1	Aisle width for pallets 2440 × 2440 crossways without operating clearance	A _{ST} (mm)
	4.34.2.2	Aisle width for pallets 2440 × 2440 crossways with 200 mm operating clearance	A _{ST} (mm)
	4.34.2.3	Aisle width for pallets 2440 × 2440 crossways with 10% operating clearance	A _{ST} (mm)
	4.35	Turning radius	Wa (mm)
	4.36	Internal turning radius ◆	b ₁₃ (mm)

PERFORMANCE DATA	5.1	Travel speed, laden / unladen ▴	km/h
	5.2	Lift speed, laden / unladen	m/s
	5.2.1	Lift speed, laden with 70% load	m/s
	5.3	Lowering speed, laden / unladen	m/s
	5.5	Drawbar pull, laden / unladen *	kN
	5.5	Drawbar pull, laden / unladen *	kN
	5.7	Gradeability, laden / unladen †	%
	5.7.1	Gradeability, laden / unladen †	%

ADDITIONAL DATA	10.1	Working pressure for attachments	MPa
	10.2	Oil volume for attachments	l/min
	10.3	Hydraulic oil tank, capacity	l
	10.4	Fuel tank, capacity	l
	10.5	Steering design	
	10.6	Number of steering rotation	
	10.7	Sound pressure level at the driver's seat LpAZ *	dB (A)
	10.7.1	Sound power level during the workcycle LwAZ	dB (A)
	10.8	Towing coupling, type DIN	

HYSTER		HYSTER		HYSTER		HYSTER	
H18XMS-9		H18XM-9		H20XMS-9		H20XM-9	
Diesel		Diesel		Diesel		Diesel	
Seated		Seated		Seated		Seated	
18	16	18	16	20	18	20	18
900	1,200	900	1,200	900	1,200	900	1,200
1,134		1,134		1,117		1,117	
3,500		3,750		3,500		3,750	

28,095		26,932		30,456		29,284	
42,622	3,473	41,601	3,331	46,627	3,829	45,758	3,526
14,162	13,933	13,838	13,094	15,101	15,356	15,000	14,285


L		L		L		L	
14.00 - 24 24PR		14.00 - 24 24PR		14.00 - 24 24PR		14.00 - 24 24PR	
14.00 - 24 24PR		14.00 - 24 24PR		14.00 - 24 24PR		14.00 - 24 24PR	
x 4	2	x 4	2	x 4	2	x 4	2
2,095		2,095		2,095		2,095	
2,108		2,108		2,108		2,108	

10		12		10		12		10		12	
4,142				4,142				4,230		4,230	
0				0				0			
4,550				4,550				4,550		4,550	
6,417				6,417				6,505		6,505	
3,372	3,408	3,372	3,408	3,372	3,408	3,372	3,408	3,372	3,408	3,372	3,408
3,408	3,441	3,408	3,441	3,408	3,441	3,408	3,441	3,408	3,441	3,408	3,441
3,540	3,576	3,540	3,576	3,540	3,576	3,540	3,576	3,540	3,576	3,540	3,576
3,599	3,635	3,599	3,635	3,599	3,635	3,599	3,635	3,599	3,635	3,599	3,635
2,240				2,240				2,240		2,240	
907				907				907		907	
7,975				8,225				7,958		8,208	
5,535				5,785				5,518		5,768	
2,923				2,923				2,923		2,923	
100	200	2,440	100	200	2,440	100	250	2,440	100	250	2,440
Dual Function Sideshift & Fork Positioning Hook Type			Dual Function Sideshift & Fork Positioning Hook Type			Dual Function Sideshift & Fork Positioning Hook Type			Dual Function Sideshift & Fork Positioning Hook Type		
2,672			2,672			2,940			2,940		
998	2,443		998	2,443		1,047	2,762		1,047	2,762	
+/- 361	1,721		+/- 361	1,721		+/- 429	1,904		+/- 429	1,904	
299			299			270			270		
374			374			374			374		
1,830	1,830		1,830	1,830		1,830	1,830		1,830	1,830	
7,827			8,137			7,810			8,120		
8,027			8,337			8,010			8,320		
8,610			8,951			8,591			8,932		
2,400	2,400		2,400	2,400		2,400	2,400		2,400	2,400	
8,397			8,707			8,380			8,690		
9,237			8,907			8,580			8,890		
9,237			9,578			9,218			9,559		
4,863			5,173			4,863			5,173		
1,700			1,886			1,700			1,886		

25	25	25	25	25	25	25	25
0.30	0.33	0.45	0.50	0.25	0.28	0.38	0.42
0.32		0.47		0.27		0.40	
0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50
161	165	162	165	161	164	161	164
200	203	200	203	199	202	199	203
38	33	39	34	34	33	35	34
49	33	51	34	44	33	45	34

22.5	22.5	22.5	22.5
100	100	100	100
203	203	203	203
303	303	303	303
Hydraulic power steering	Hydraulic power steering	Hydraulic power steering	Hydraulic power steering
4.4	4.4	4.4	4.4
TBD	TBD	TBD	TBD
TBD	TBD	TBD	TBD
Yes / Pin	Yes / Pin	Yes / Pin	Yes / Pin

TRUCK DIMENSIONS

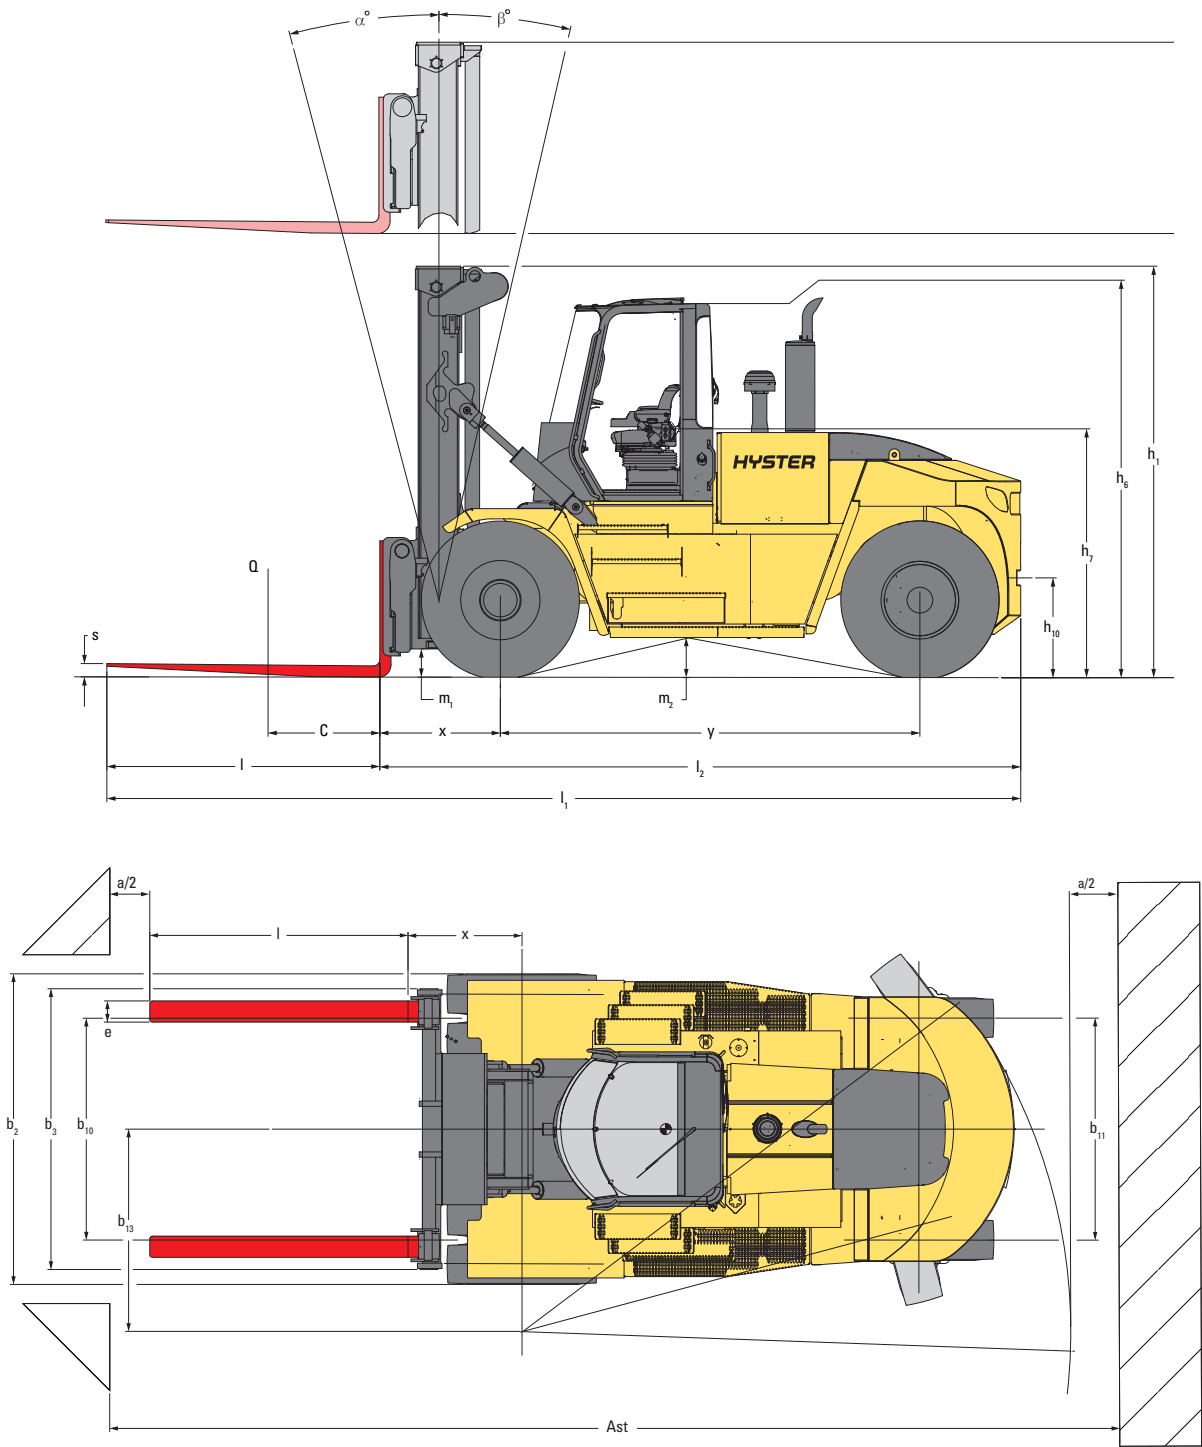

MAST AND CAPACITY INFORMATION



H18XM(S)-9 - Rated capacity kg @ 900 and @ 1.200 mm

Mast	Lift height h ₃ + s (mm)	Lowered height h ₁ (mm)	Free lift height h ₂ (mm)	Extended height h ₄ (mm)	Dual Function Side Shift & Fork Positiong carriage			
					Capacity @ 900 mm load centre (kg)	Mast tilt (fwd/bwd) (°)	Capacity @ 1.200 mm load centre (kg)	Mast tilt (fwd/bwd) (°)
2 Stage NFL	3,750	3,692	0	5,517	18,000	10 / 12	16,000	10 / 12
	4,650	4,142	0	6,417	18,000	10 / 12	16,000	10 / 12
	5,400	4,517	0	7,167	18,000	10 / 12	16,000	10 / 12
	6,200	4,917	0	7,967	17,880	10 / 12	15,840	10 / 12
	6,700	5,167	0	8,467	17,700	10 / 12	15,640	10 / 12
	7,000	5,317	0	8,767	17,600	10 / 12	15,520	10 / 12

H20XM(S)-9 - Rated capacity kg @ 900 and @ 1.200 mm

Mast	Lift height h ₃ + s (mm)	Lowered height h ₁ (mm)	Free lift height h ₂ (mm)	Extended height h ₄ (mm)	Dual Function Side Shift & Fork Positiong carriage			
					Capacity @ 900 mm load centre (kg)	Mast tilt (fwd/bwd) (°)	Capacity @ 1.200 mm load centre (kg)	Mast tilt (fwd/bwd) (°)
2 Stage NFL	3,750	3,780	0	5,605	20,000	10 / 12	18,000	10 / 12
	4,650	4,230	0	6,505	20,000	10 / 12	18,000	10 / 12
	5,400	4,605	0	7,255	20,000	10 / 12	18,000	10 / 12
	6,200	5,005	0	8,055	20,000	10 / 12	17,820	10 / 12
	6,700	5,255	0	8,555	19,940	10 / 7	17,620	10 / 7
	7,000	5,405	0	8,855	19,680	10 / 7	17,500	10 / 7

RATED CAPACITY

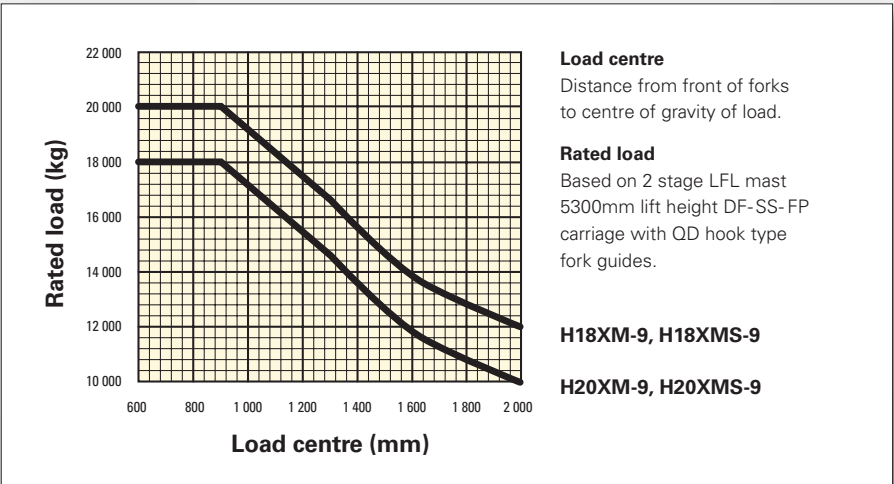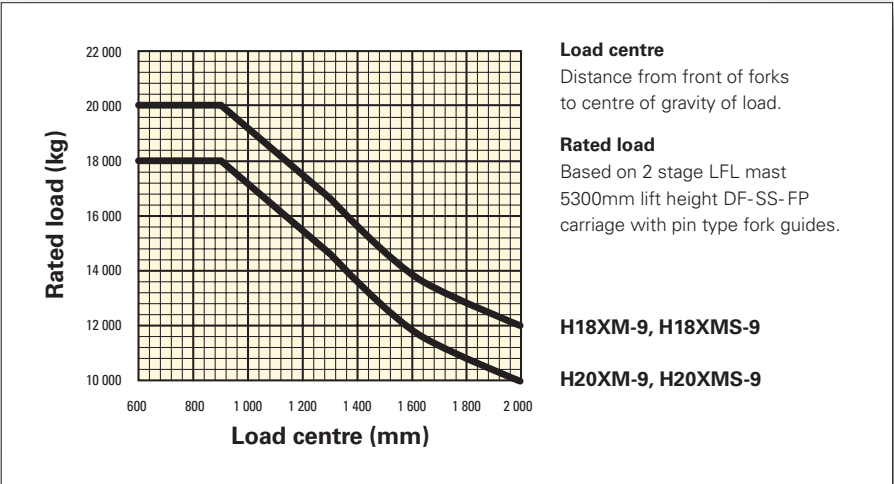

NOTES:

Specifications are affected by the condition of the vehicle and how it is equipped, as well as the nature and condition of the operating area. Inform your dealer of the nature and condition of the intended operating area when purchasing your Hyster Truck.

- Weights are based on the following specifications: Complete truck with cab, pneumatic tyres, mast, carriage and forks
- Unladen with new tyres
- ¶ Bottom of forks
- Full suspension seat in depressed position
- ◆ Distance centre truck to centre of internal turning radius
- * at 1.6 km/h.
- Travel speed laden/unladen limited at 25 km/h as factory default
- * at stall.
- † Gradeability figures are provided for comparison of tractive performance, but are not intended to endorse the operation of vehicle on the stated inclines. Follow instructions in the operating manual regarding operation on inclines.
- * Measured according to the test cycles and based on the weighting values contained in EN12053.

NOTICE:

Care must be exercised when handling elevated loads. When the carriage and/or load is elevated, truck stability is reduced. It is important that the mast tilt in either direction is kept to a minimum when loads are elevated.

Operators must be trained and must read, understand and follow the instructions contained in the Operating Manual.

All values are nominal values and they are subject to tolerances. For further information, please contact the manufacturer.

Hyster products are subject to change without notice.

Lift trucks illustrated may feature optional equipment. Values may vary with alternative configurations.

CE Safety:

This truck conforms to the current EU requirements.

POWERTRAINS

DESIGNATION	1.1	Manufacturer (abbreviation)
	1.2	Manufacturer's type designation
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas

HYSTER	
H18XMS - H20XM-9	
Diesel	

POWER UNIT	7.1	Engine manufacturer / type
	7.2	Engine output according to ISO 1585 kW
	7.2.1	Max. engine power according to ISO 1585 kW / min ⁻¹
	7.3	Rated speed min ⁻¹
	7.3.1	Torque at 1/min Nm / min ⁻¹
	7.4	Number of cylinders / displacement (-)/cm ³
	7.5.1	Fuel consumption according to VDI cycle l/h
	7.5.2	Alternator A
	7.10	Battery voltage/nominal capacity (V)/(Ah)

Cummins	QSB 6.7
164	2,000
172	1,800
2,000	
949	1,400
6	6,690
On request	
120	
24	102

DRIVE TRAIN	8.1	Type of drive unit
	8.2	Transmission manufacturer / type
	8.6	Wheel drive / drive axle manufacturer / type
	8.4	Service brake
	8.5	Parking brake

Torque Converter	
ZF	5WG211
Axle Tech	PRC1756W3H
Oil immersed disc	
Dry disc on drive axle	

FRONT END EQUIPMENT



Range of 2 stage NFL masts



Pin type and quick disconnect hook type forks



Dual Function Pin Type



Dual Function Hook Type



Dual Function Hook Type with 2 extra functions

STANDARD EQUIPMENT

- Cummins QSB 6.7L 164 / max 172 KW @ 1.800 rpm Turbo Diesel Engine
 - Stage IIIA Compliant
 - ECO-eLo / HiP performance modes
 - Hibernate Idle
- ZFWG 211 5 speed Hydrodynamic Transmission
- 2-Stage LFL Mast with maximum fork height of 3750mm
- Dual Function side shift & fork positioning Carriages
 - H18XM(S)-9: 2680mm Wide Pin Type Side shift and Individual Fork Positioner – Fork Control
 - H18XM(S)-9: 2680mm Wide Hook Type (QD) Side shift and Individual Fork Positioner – Fork Control
 - H18XM(S)-9: 2680mm Wide Hook Type (QD) Side shift and Individual Fork Positioner – Fork Control with 2 additional Aux. valves for Hook on attachment
 - H20XM(S)-9: 2940mm Wide Pin Type Side shift and Individual Fork Positioner – Fork Control
 - H20XM(S)-9: 2940mm Wide Hook Type QD Side shift and Fork Positioner – Individual Fork Control
 - H20XM(S)-9: 2940mm Wide Hook Type (QD) Side shift and Fork Positioner – Individual Fork Control with 2 additional Aux. valves for Hook on attachment
- Wet Disc Brakes
- Axle Tech PRC 1756 W3H Drive Axle
- Up to 6-way hydraulic controls with 4 levers and switches combination.
- Mast Tilt: 10° Forward / 12° Back
- Directional Control Lever
- Overhead Guard Featuring:
 - Seat-Side Hydraulic Control
 - Multifunction Display Panel
 - Interior Wide Angle Mirrors
 - Telescoping & Tilting Steering Column

- Floor Mat
- Isolated Mounting for Low Noise and Vibration
- Handrails for Operator Entry and Exits
- Amber strobe light- ignition key and switch activated
- Tyres- Drive and Steer
 - 14.00- 24 Standard pneumatic
- Steering Wheel with Spinner Knob
- Electronic Horn
- Mechanical, Full Suspension Vinyl Seat with integrated adjustable armrest and seat belt
- Operator Restraint System
- Operator Presence System
- Air intake pre-cleaner bowl type with Rain Cap
- Overhead Exhaust
- Lockable Battery Disconnect Switch
- 24V Electrical System
- 120 Amp Alternator
- Manual Tilt Operator Compartment for Service Access
- Light Kit 2:
 - LED rear mounted cluster with stop, reverse direction indicator
 - 2 x Halogen working lights mounted on the mast
 - 2 x Halogen drive lights on front fenders
 - 2 x Halogen working lights mounted rear of the cab direction and position light front fender
- Self-adjustable back up Alarm volume > 5dB(A) ambient
- Non-locking Fuel Cap
- Literature Package
 - Operator's Manual
- **Warranty**
 - 12 Months / 2,000 Hours Manufacturer's Warranty

OPTIONAL EQUIPMENT

- Masts
 - 2-Stage LFL Masts with maximum fork heights from 4650mm to 7000mm
 - 2-Stage FFL Masts with maximum fork heights from 3900mm to 7100mm
 - 3-Stage FFL Masts with maximum fork heights from 5500mm to 9100mm
- Carriages for 2-Stage & 3-Stage FFL
 - H18XM(S)-9: 2700mm Wide Hook Type QD Side shift Fork Positioner – Individual Fork Control
 - H18XM(S)-9: 2700mm Wide Multi-Purpose Hook Type Side shift Fork Positioner – Individual Fork Control
 - H20XM(S)-9: 2900mm Wide Multi-Purpose Hook Type Side shift Fork Positioner – Individual Fork Control
- 5 Function Hydraulic Control Valve with 3 Levers, 2 Switches
- 6 Function Hydraulic Control Valve with 4 Levers, 2 Switches
- Hydraulic Control 5 function Joystick
- Mast Tilt:
 - 10° Forward / 10° Back
 - 10° Forward / 9° Back
 - 10° Forward / 7° Back
 - 10° Forward / 6° Back
 - 5° Forward / 5° Back
- MONOTROL™ Pedal
- Tyres – Drive and Steer
 - 14.00- R24 Trelleborg radial
 - 14.00- R24 MICHELIN radial
 - 14.00- R24 Trelleborg solids
- Front and Rear Mud Flaps
- Steer Wheel Nut Protection
- Enclosed Cab with or without Air Conditioning includes:
 - Seat-Side Hydraulic Control Levers
 - Multifunction Display Panel
 - Interior Wide Angle Mirrors
 - Telescoping & Tilting Steering Column
 - I- style Front screen Wiper
 - H- style Front screen Wiper
 - Floor Mat
 - 24-12V DC/DC Converter
 - Front (single blade), Top & Rear Wipers
 - Heater
 - Re-circulation Fan

- Enclosed Cab options
 - Top and rear sun shades
 - Temperature controller
 - Air conditioner, manual controlled
 - Air conditioner, automatically controlled
 - Reading light
 - Trainer seat
 - Circulation Fan
 - IT console for on-board computer
 - Storage console
 - Heated top window
 - Engine start interlock
 - WEBASTO Diesel powered heater (SPED)
 - Radio preparation, inclusive wire, two speakers and antenna
 - Rain top for OHG
 - Wire mesh protection guard on Top of cab
 - External Mirror right and left
- Seats
 - Mechanical, Full Suspension High backrest Vinyl or Cloth Seat
 - Pneumatic, Full Suspension Vinyl or Cloth Seat
 - Pneumatic, Full Suspension High backrest Vinyl or Cloth Seat
 - Deluxe Air Suspended Full Suspension Cloth Seat
 - Heated Deluxe Air Suspended Full Suspension Cloth Seat
- 3-point seat belt for Deluxe Seat
- Powered Tilt Operator Compartment
- Various Light Kits
- Hydraulic Accumulator
- Lockable diesel fuel cap
- Lifting Eyes
- Engine Block Heater (230V)
- NATO Start aid connector (24V)
- Traction Speed Limiter
- Automatic Engine Shutdown
- Hydraulic temperature protection
- Pressure compensated lowering
- Hyster Tracker Wireless Asset Management system

Other options available through
Special Products Engineering Development (SPED).
Contact Hyster for details.

HYSTER® DEALERS



Contact your nearest Hyster Dealership
by visiting www.hyster.com.au



Contact your local Hyster Dealer

HYSTER ASIA PACIFIC

1 Bullecourt Avenue, Milperra NSW, Australia 2214
Tel: +61 (2) 9795 3800 Fax: +61 (2) 9792 8484

No. 49, Jalan Astaka V8/84A, Bukit Jelutong,
40150 Shan Alam, Selangor, Malaysia
Tel: +603 7831 3385


hyster.com/pacific/en-au
hyster.com/asia/en-sg



/Hysterasiapacific



@Hyster_AP

 is a Registered Trademark.

HYSTER is a Registered Trademark. STRONG PARTNERS. TOUGH TRUCKS. EZXCHANGE, HSM and VISTA are trademarks in the United States and certain other jurisdictions. © Hyster Asia Pacific 2016. All rights reserved. Printed in Australia. Specifications and details in this brochure are subject to change without prior notification. Please consult with your Hyster dealer for the most up to date information and to confirm exact capacities.
3990435 Rev. 00-10/15-TLC

HYSTER.COM.AU