



**STRONG PARTNERS.
TOUGH TRUCKS.™**

H8-9XM EC6-8 H9-11XM ECD7-9 SERIES


TECHNICAL GUIDE




WWW.HYSTER.COM.AU

▶ DIMENSIONS


STANDARD CAB POSITION

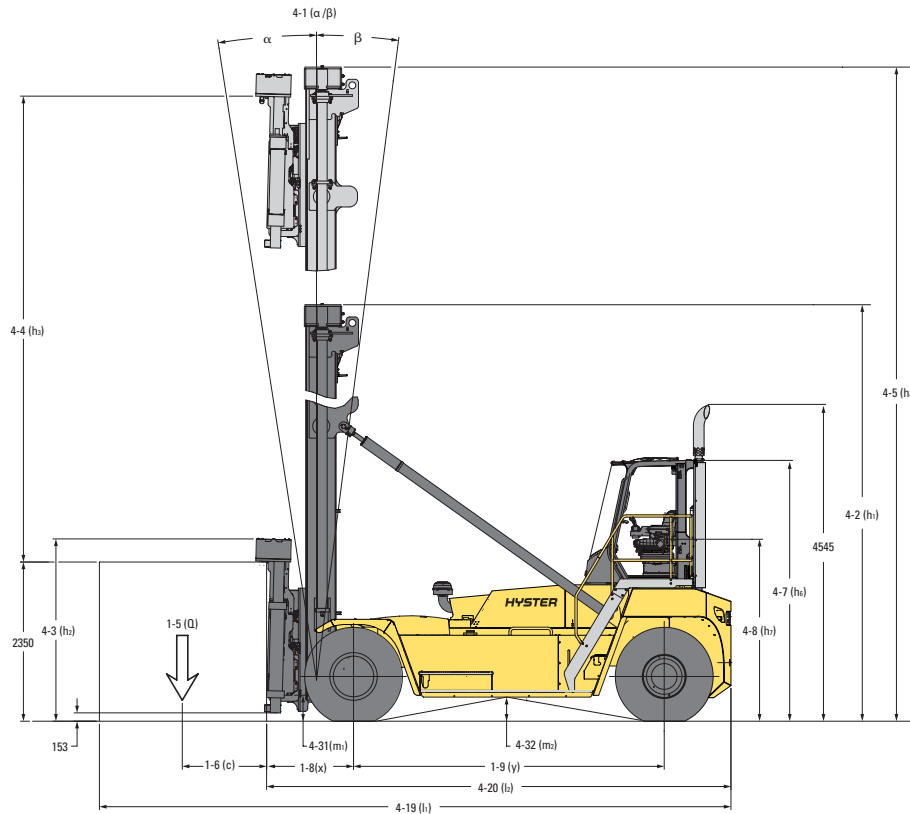

OPTIONAL RAISED CAB POSITION

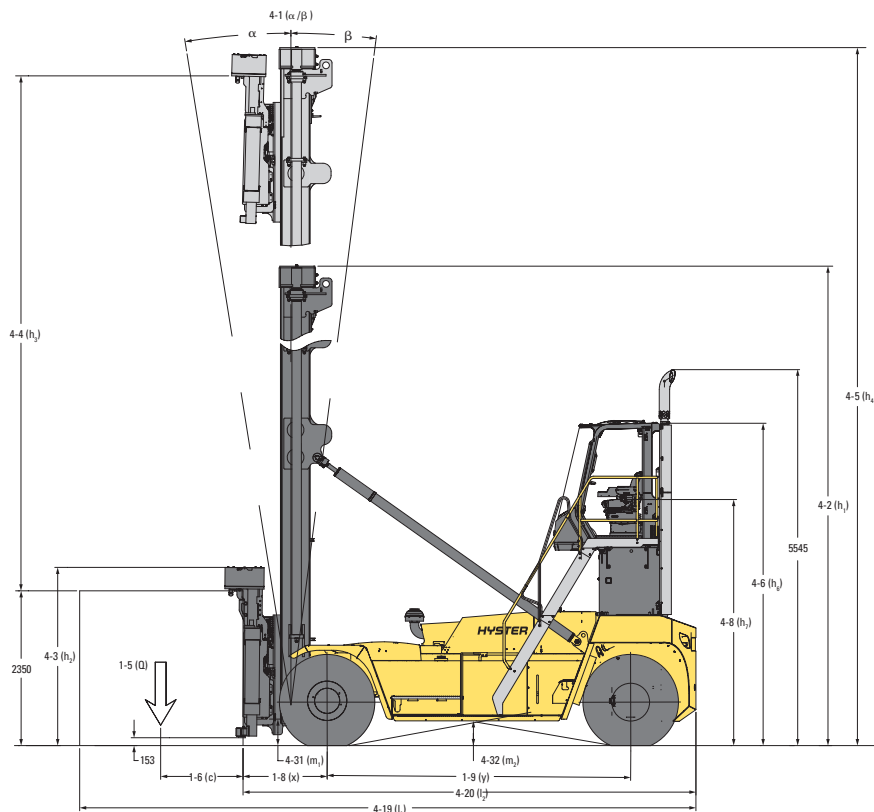

Note: For raised cab version add 1000mm for h6 and h7.

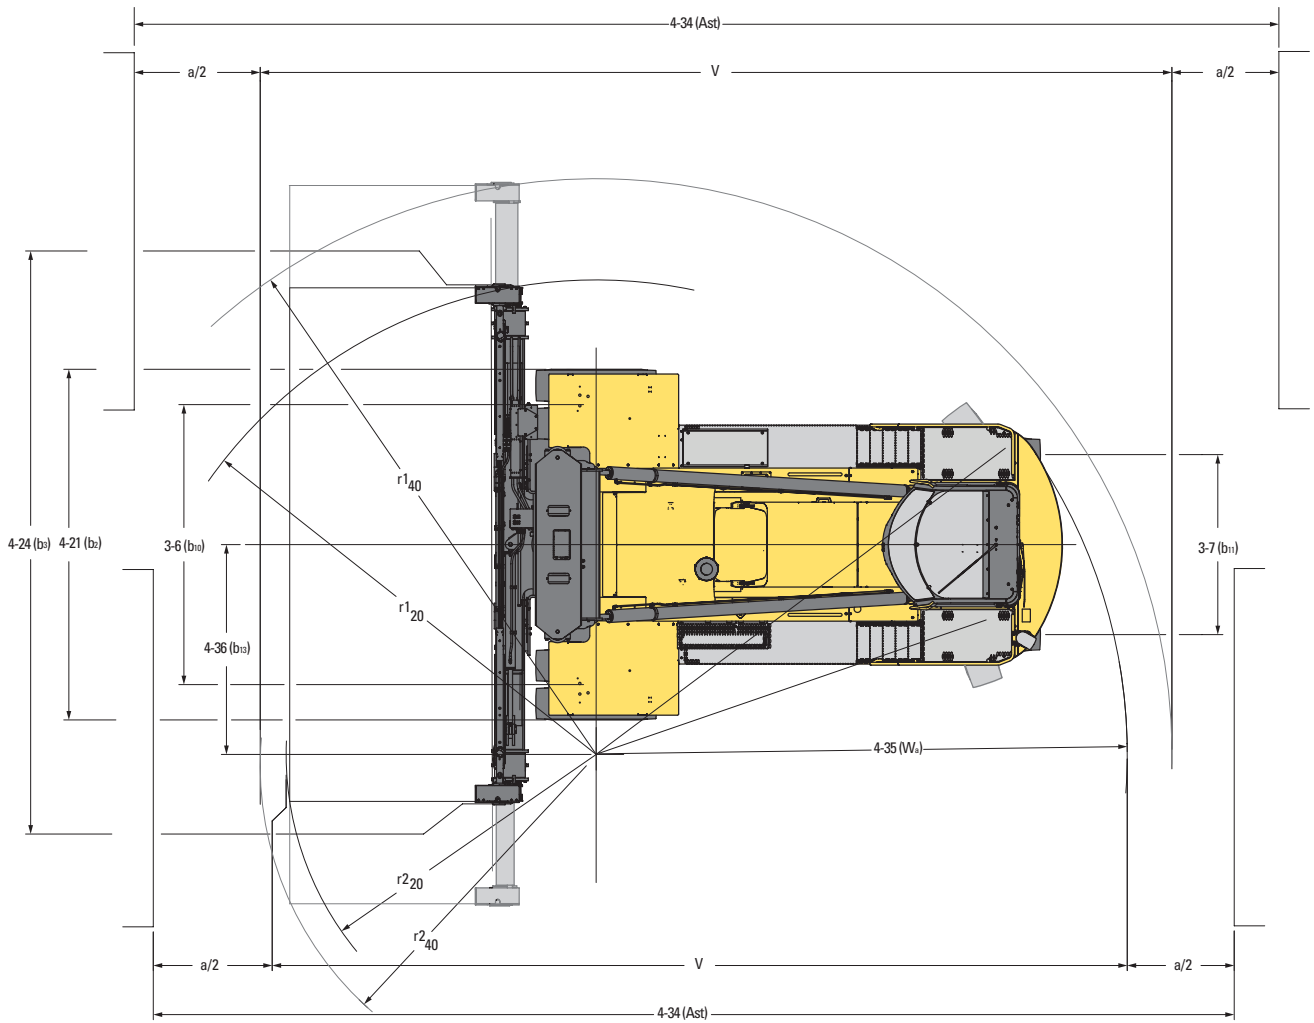

- r_1 = radius of swing of container rear corner
- r_2 = radius of swing of container front corner
- W_a = outside turning radius of the truck
- a = total operating clearance:
 - = 200 mm (100 mm each side acc. VDI) see VDI line 4-34-3 and 4-34-4
- V = (theoretical) 90° - stacking aisle width, no intrusive stacking:
- $V = r_2 + \text{the larger of } r_1 \text{ or } W_a$
- Ast = (practical) 90° - stacking aisle width, no intrusive stacking and with clearance:
- $Ast = V + a$

> H8XM-EC6 / H8XM-EC7 / H9XM-EC7 SPECIFICATIONS

			HYSTER		HYSTER		HYSTER	
			H8XM-EC6		H8XM-EC7		H9XM-EC7	
GENERAL	1-1	Manufacturer			HYSTER		HYSTER	
	1-2	Model designation			H8XM-EC6		H8XM-EC7	
	1-3	Drive			Diesel		Diesel	
	1-4	Operator type			Seated		Seated	
	1-5	Load capacity at load center, nominal	Q	kg	8,000		8,000	
	1-5	Load capacity at load center, max lift (1)	Q	kg	8,000		8,000	
	1-6	Load center distance	c ₁	mm	1,220		1,220	
	1-8	Load distance	x	mm	1,280		1,280	
	1-9	Wheelbase	y	mm	4,500		4,500	
	1-10	Stacking height at first row (number x container height)		#	6 x 8' 6"		7 x 8' 6"	
1-10	Stacking height at first row (number x container height)		#	5 x 9' 6"		6 x 9' 6"		
WT.	2-1	Service weight			35,508		36,862	
	2-2	Axle loading with load, front / rear		kg	35,313	8,194	36,794	8,068
	2-3	Axle loading without load, front / rear		kg	22,869	12,639	24,350	12,513
WHEELS	3-1	Tyre type			Pneumatic		Pneumatic	
	3-2	Tyre size, front			14.00 - 24 24PR		14.00-24 24PR	
	3-3	Tyre size, rear			14.00 - 24 24PR		14.00-24 24PR	
	3-5	Wheels, number front / rear (x = driven wheels)			x 4 / 2		x 4 / 2	
	3-6	Tread, front	b ₁₀	mm	3,282		3,282	
	3-7	Tread, rear	b ₁₁	mm	2,108		2,108	
	3-7	Tread, rear	b ₁₁	mm	2,108		2,108	
DIMENSIONS	4-1	Mast tilt, forward / backward	α/β	deg	4 / 3		4 / 3	
	4-2	Height, mast lowered	h ₁	mm	9,495		10,795	
	4-3	Free lift	h ₂	mm	0		0	
	4-4	Lift	h ₃	mm	13,850		16,450	
	4-4-1	Lift height, minimum (2)	h _{3.1.1}	mm	2,350		2,350	
	4-4-2	Lift height, maximum (2)	h _{3.1.2}	mm	16,200		18,800	
	4-5	Height, mast extended	h ₄	mm	16,420		19,020	
	4-7	Height of overhead guard (closed cab) (3)	h ₆	mm	3,844		3,844	
	4-7-2	Height of overhead guard (closed cab w/ strobe light)	h ₆	mm	3,976		3,976	
	4-7-3	Height of overhead guard (closed cab w/ work lights)	h ₆	mm	4,035		4,035	
	4-8	Seat height to SIP (4)	h ₇	mm	2,676		2,676	
	4-19	Overall length	l ₁	mm	9,185		9,185	
	4-20	Length to face of load	l ₂	mm	6,747		6,747	
	4-21	Overall width	b ₂	mm	4,110		4,110	
	4-24	Spreader width, retracted/extended	b ₃	mm	6,084	12,218	6,084	12,218
	4-31	Ground clearance, lowest point	m ₁	mm	236		236	
	4-32	Ground clearance, center or wheelbase	m ₂	mm	383		383	
	4-34-3	Aisle width with 20' Container REDUCED / FULL stroke (5)	Ast ₂₀	mm	10,737	10,267	10,737	10,267
	4-34-4	Aisle width with 40' Container REDUCED / FULL stroke (5)	Ast ₄₀	mm	14,317	14,019	14,317	14,019
4-35	Outside turning radius REDUCED / FULL stroke	W _a	mm	6,797	6,327	6,797	6,327	
4-36	Internal turning radius REDUCED / FULL stroke	b ₁₃	mm	3,438	2,620	3,438	2,620	
PERFORMANCE	5-1	Travel speed, with / without load		km/h	20	25	20	25
	5-1-1	Travel speed, with load locked / without load		km/h	On request		On request	
	5-2	Lifting speed, with / without load		m/s	0.51	0.68	0.51	0.68
	5-2-1	Lifting speed, with 70% load		m/s	0.60		0.60	
	5-3	Lowering speed with / without load		m/s	0.55	0.55	0.55	0.55
	5-5	Drawbar pull - 1 mph 1.6 km/h, with / without load		kN	149	150	148	149
	5-6	Drawbar pull - max, with / without load		kN	179	181	178	180
	5-7	Gradeability - 1 mph 1.6 km/h, with / without load (6)		%	37	39	33	36
	5-8	Gradeability - max, with / without load (6)		%	46	39	41	36
5-9	Acceleration time, with / without load		sec	On request		On request		

- (1) Load capacity at highest container positions may be less, depending on truck model, stacking height and tyres.
- (2) Minimum/maximum height of twistlocks.
- (3) With cab mounted work lights add 191 mm, with strobe light add 132 mm.
- (4) With raised cabin position add 1000 mm.
- (5) Includes 200 mm clearance. FULL / REDUCED steer cylinder stroke.
- (6) Gradeability figures are provided for comparison of tractive performance, but are not intended to endorse the operation of vehicle on the stated inclines.

H9XM-EC8 / H9XM-ECD7 / H9-ECD8 SPECIFICATIONS



GENERAL	1-1	Manufacturer			HYSTER		HYSTER		HYSTER			
	1-2	Model designation			H9XM-EC8		H9XM-ECD7		H9XM-ECD8			
	1-3	Drive			Diesel		Diesel		Diesel			
	1-4	Operator type			Seated		Seated		Seated			
	1-5	Load capacity at load center, nominal	Q	kg	9,000		9,000		9,000			
	1-5	Load capacity at load center, max lift (1)	Q	kg	9,000		9,000		7,920			
	1-6	Load center distance	c ₁	mm	1,220		1,220		1,220			
	1-8	Load distance	x	mm	1,280		1,309		1,309			
	1-9	Wheelbase	y	mm	4,500		4,500		4,500			
	1-10	Stacking height at first row (number x container height)		#	8 x 8' 6"		6+1 x 8' 6"		7+1 x 8' 6"			
	1-10	Stacking height at first row (number x container height)		#	7 x 9' 6"		5+1 x 9' 6"		6+1 x 9' 6"			
WT.	2-1	Service weight			kg		41,437		39,468		40,853	
	2-2	Axle loading with load, front / rear			kg	39,896	10,540	39,088	9,380	40,602	9,251	
	2-3	Axle loading without load, front / rear			kg	25,896	15,540	25,030	14,438	26,544	14,309	
WHEELS	3-1	Tyre type			Pneumatic		Pneumatic		Pneumatic			
	3-2	Tyre size, front			14.00 - 24 24PR		14.00 - 24 24PR		14.00 - 24 24PR			
	3-3	Tyre size, rear			14.00 - 24 24PR		14.00 - 24 24PR		14.00 - 24 24PR			
	3-5	Wheels, number front / rear (x = driven wheels)			x4 / 2		x4 / 2		x4 / 2			
	3-6	Tread, front	b ₁₀	mm	3,507		3,282		3,282			
	3-7	Tread, rear	b ₁₁	mm	2,108		2,108		2,108			
	DIMENSIONS	4-1	Mast tilt, forward / backward		α/β	deg		4 / 3		4 / 3		
4-2		Height, mast lowered		h ₁	mm		12,095		9,495		10,795	
4-3		Free lift		h ₂	mm		0		0		0	
4-4		Lift		h ₃	mm		19,050		13,850		16,450	
4-4-1		Lift height, minimum (2)		h _{3.1.1}	mm		2,350		2,470		2,470	
4-4-2		Lift height, maximum (2)		h _{3.1.2}	mm		21,400		16,320		18,920	
4-5		Height, mast extended		h ₄	mm		21,620		16,420		19,020	
4-7		Height of overhead guard (closed cab) (3)		h ₆	mm		3,844		3,844		3,844	
4-7-2		Height of overhead guard (closed cab w/ strobe light)		h ₆	mm		3,976		3,976		3,976	
4-7-3		Height of overhead guard (closed cab w/ work lights)		h ₆	mm		4,035		4,035		4,035	
4-8		Seat height to SIP (4)		h ₇	mm		2,676		2,676		2,676	
4-19		Overall length		l ₁	mm		9,185		9,214		9,214	
4-20		Length to face of load		l ₂	mm		6,747		6,776		6,776	
4-21		Overall width		b ₂	mm		4,335		4,110		4,110	
4-24		Spreader width, retracted/extended'		b ₃	mm		6,084	12,218	6,566	12,700	6,566	12,700
4-31		Ground clearance, lowest point		m ₁	mm		236		236		236	
4-32		Ground clearance, center or wheelbase		m ₂	mm		383		383		383	
4-34-3		Aisle width with 20' Container REDUCED / FULL stroke (5)		Ast ₂₀	mm		10,737	10,267	10,766	10,296	10,766	10,296
4-34-4		Aisle width with 40' Container REDUCED / FULL stroke (5)		Ast ₄₀	mm		14,317	14,019	14,582	14,281	14,582	14,281
4-35		Outside turning radius REDUCED / FULL stroke		W _a	mm		6,797	6,327	6,797	6,327	6,797	6,327
4-36	Internal turning radius REDUCED / FULL stroke		b ₁₃	mm		3,438	2,620	3,438	2,620	3,438	2,620	
PERFORMANCE	5-1	Travel speed, with / without load			km/h		15.5	25	20	25	20	25
	5-1-1	Travel speed, with load locked / without load			km/h		On request		10	25	10	25
	5-2	Lifting speed, with / without load			m/s		0.46	0.62	0.46	0.62	0.46	0.62
	5-2-1	Lifting speed, with 70% load			m/s		0.54		0.54		0.54	
	5-3	Lowering speed with / without load			m/s		0.55	0.55	0.55	0.55	0.55	0.55
	5-5	Drawbar pull - 1 mph 1.6 km/h, with / without load			kN		147	149	148	149	147	149
	5-6	Drawbar pull - max, with / without load			kN		178	180	178	180	178	180
	5-7	Gradeability - 1 mph 1.6 km/h, with / without load (6)			%		31	35	33	39	32	38
	5-8	Gradeability - max, with / without load (6)			%		39	35	40	39	39	38
5-9	Acceleration time, with / without load			sec		On request		On request		On request		

- (1) Load capacity at highest container positions may be less, depending on truck model, stacking height and tyres.
- (2) Minimum/maximum height of twistlocks.
- (3) With cab mounted work lights add 191 mm, with strobe light add 132 mm.
- (4) With raised cabin position add 1000 mm.
- (5) Includes 200 mm clearance. FULL / REDUCED steer cylinder stroke.
- (6) Gradeability figures are provided for comparison of tractive performance, but are not intended to endorse the operation of vehicle on the stated inclines.

> H10XM-ECD8 / H11XM-ECD8 / H11-ECD9 SPECIFICATIONS

			HYSTER		HYSTER		HYSTER	
			H10XM-ECD8		H11XM-ECD8		H11XM-ECD9	
GENERAL	1-1	Manufacturer			HYSTER		HYSTER	
	1-2	Model designation			H10XM-ECD8		H11XM-ECD8	
	1-3	Drive			Diesel		Diesel	
	1-4	Operator type			Seated		Seated	
	1-5	Load capacity at load center, nominal	Q	kg	10,000		11,000	
	1-5	Load capacity at load center, max lift (1)	Q	kg	10,000		10,840	
	1-6	Load center distance	c ₁	mm	1,220		1,220	
	1-8	Load distance	x	mm	1,309		1,309	
	1-9	Wheelbase	y	mm	4,500		4,500	
	1-10	Stacking height at first row (number x container height)	#		7+1 x 8' 6"		7+1 x 8' 6"	
1-10	Stacking height at first row (number x container height)	#		6+1 x 9' 6"		6+1 x 9' 6"		
WT.	2-1	Service weight			41,886		42,847	
	2-2	Axle loading with load, front / rear			42,166	9,719	43,730	10,117
	2-3	Axle loading without load, front / rear			26,546	15,339	26,548	16,299
WHEELS	3-1	Tyre type			Pneumatic		Pneumatic	
	3-2	Tyre size, front			14.00 - 24 24PR		14.00 - 24 24PR	
	3-3	Tyre size, rear			14.00 - 24 24PR		14.00 - 24 24PR	
	3-5	Wheels, number front / rear (x = driven wheels)			x 4 / 2		x 4 / 2	
	3-6	Tread, front	b ₁₀	mm	3,507		3,507	
	3-7	Tread, rear	b ₁₁	mm	2,108		2,108	
	DIMENSIONS	4-1	Mast tilt, forward / backward	α/β	deg	4 / 3		4 / 3
4-2		Height, mast lowered	h ₁	mm	10,795		10,795	
4-3		Free lift	h ₂	mm	0		0	
4-4		Lift	h ₃	mm	16,450		16,450	
4-4-1		Lift height, minimum (2)	h _{3.1.1}	mm	2,470		2,470	
4-4-2		Lift height, maximum (2)	h _{3.1.2}	mm	18,920		18,920	
4-5		Height, mast extended	h ₄	mm	19,020		19,020	
4-7		Height of overhead guard (closed cab) (3)	h ₆	mm	3,844		3,844	
4-7-2		Height of overhead guard (closed cab w/ strobe light)	h ₆	mm	3,976		3,976	
4-7-3		Height of overhead guard (closed cab w/ work lights)	h ₆	mm	4,035		4,035	
4-8		Seat height to SIP (4)	h ₇	mm	2,676		2,676	
4-19		Overall length	l ₁	mm	9,214		9,214	
4-20		Length to face of load	l ₂	mm	6,776		6,776	
4-21		Overall width	b ₂	mm	4,335		4,335	
4-24		Spreader width, retracted/extended	b ₃	mm	6,566	12,700	6,566	12,700
4-31		Ground clearance, lowest point	m ₁	mm	236		236	
4-32		Ground clearance, center or wheelbase	m ₂	mm	383		383	
4-34-3		Aisle width with 20' Container REDUCED / FULL stroke (5)	Ast ₂₀	mm	10,766	10,296	10,766	10,296
4-34-4		Aisle width with 40' Container REDUCED / FULL stroke (5)	Ast ₄₀	mm	14,582	14,281	14,582	14,281
4-35		Outside turning radius REDUCED / FULL stroke	W _a	mm	6,797	6,327	6,797	6,327
4-36	Internal turning radius REDUCED / FULL stroke	b ₁₃	mm	3,438	2,620	3,438	2,620	
PERFORMANCE	5-1	Travel speed, with / without load			20	25	20	25
	5-1-1	Travel speed, with load locked / without load			10	25	10	25
	5-2	Lifting speed, with / without load			0.46	0.62	0.46	0.62
	5-2-1	Lifting speed, with 70% load			0.54		0.54	
	5-3	Lowering speed with / without load			0.55	0.55	0.55	0.55
	5-5	Drawbar pull - 1 mph 1.6 km/h, with / without load			147	149	147	149
	5-6	Drawbar pull - max, with / without load			178	179	177	179
	5-7	Gradeability - 1 mph 1.6 km/h, with / without load (6)			30	37	29	37
	5-8	Gradeability - max, with / without load (6)			37	37	36	37
5-9	Acceleration time, with / without load			On request		On request		

(1) Load capacity at highest container positions may be less, depending on truck model, stacking height and tyres.

(2) Minimum/maximum height of twistlocks.

(3) With cab mounted work lights add 191 mm, with strobe light add 132 mm.

(4) With raised cabin position add 1000 mm.

(5) Includes 200 mm clearance. FULL / REDUCED steer cylinder stroke.

(6) Gradeability figures are provided for comparison of tractive performance, but are not intended to endorse the operation of vehicle on the stated inclines.

* Please contact your Hyster dealer / manufacturer.



GENERAL	1-1	Manufacturer			HYSTER
	1-2	Model designation			H6-8XM-EC6-8 / H8-11XM-ECD7-9
	1-3	Drive			Diesel

ENGINE	7-1	Engine manufacturer / model			Cummins / QSB 6.7 164
	7-1a	Emission legislation			Stage IIIA
	7-2	Engine power rated to ISO 1585		kW	164
	7-2-1	Engine power, maximum		kW	172
	7-3	Rated speed		min ⁻¹	2,000
	7-3-1	Engine torque @rpm		Nm/min ⁻¹	949 @ 1500
	7-4	Number of cylinders / displacement		# / cm ³	6 / 6,690
		Turbocharger		Type	Wastegate, water cooled
	7-8	Alternator output		Amps	120
	7-9	Electrical system voltage		V	24
7-10	Battery voltage, rated capacity		V / Ah	24 / 102	

DRIVE	8-1	Drive control / Transmission		Type / #	Torque Converter
	8-2	Transmission manufacturer / type		Type / #	ZF 5WG211
	8-4	Transmission speeds forward / backward		#	5 / 3
	8-5	Coupling		Type	Torque Converter
	8-6	Wheel drive / drive axle manufacturer / type		Type / #	AxleTech / PRC 1756W3H
	8-11	Service brake		Type	Oil immersed (wet) disc
	8-12	Parking brake		Type	Spring applied, dry disc on drive axle

SPREADER	9-1	Spreader manufacturer / type		Type / #	Elme / 588TB MPS	Elme / 584LD PPS
	9-1-1	Pile slope, mechanical without PPS		mm	+200 / - 200	+200 / - 200
	9-1-2	Pile slope, total with PPS		degrees	+/- 6	
	9-3	Size of containers		ft	ISO 20' - 40'	
	9-4	Side shift	b ₉	mm	+ 600 / - 600	
9-4-1	Telescoping time, extend / retract		seconds	14 / 16		

MISC	10-1	Operating pressure for attachments		bar	22.5	
	10-2	Oil volume for attachments		l/m	60	
	10-3	Hydraulic tank capacity		l	268	
	10-4	Fuel tank capacity		l	350	
	10-5	Steering design			Hydraulic power steering	
	10-6	Number of steering rotation			5.0	
	10-7	Sound pressure level at driver's seat	Lpaz	dB(A)	68.3	
10-7-1	Sound pressure level at driver's seat	Lwaz	dB	On request		

NOTES:

Specifications are affected by the condition of the vehicle and how it is equipped, as well as the nature and condition of the operating area. Inform your dealer of the nature and condition of the intended operating area when purchasing your Hyster® truck.

- (1) Load capacity at highest container positions may be less, depending on truck model, stacking height and tyres.
- (2) Minimum/maximum height of twistlocks.
- (3) With cab mounted work lights add 6"/132 mm.
- (4) With raised cabin position add 39" / 1000 mm.
- (5) Includes 8"/200 mm clearance. FULL / REDUCED steer cylinder stroke.
- (6) Gradeability figures are provided for comparison of tractive performance, but are not intended to endorse the operation of vehicle on the stated inclines.

All capacities are according to EN1459.

All specifications and capacities are valid for trucks equipped with a Hyster® container handling spreader for handling ISO containers.

NOTICE:

Care must be exercised when handling elevated loads. Operators must be trained and must read, understand and follow the instructions contained in the Operating Manual.

All values are nominal values and they are subject to tolerances. For further information, please contact the manufacturer.

Hyster products are subject to change without notice.

Lift trucks illustrated may feature optional equipment.

Values may vary with alternative configurations.



CERTIFICATION: Hyster lift trucks meet the design and construction requirements of B56.1-1969, per OSHA Section 1910.178(a)(2), and also comply with the B56.1 revision in effect at time of manufacture. Certification of compliance with the applicable ANSI standards appears on the lift truck. Performance specifications are for a truck equipped as described under Standard Equipment on this Technical Guide. Performance specifications are affected by the condition of the vehicle and how it is equipped, as well as by the nature, condition of the operating area, proper service and maintenance of the vehicle. If these specifications are critical, the proposed application should be discussed with your dealer.

NOTE: Specifications, unless otherwise listed, are for a standard truck without optional equipment.

Safety: This truck conforms to the current EU and ANSI requirements.

Specification data is based on VDI 2198.



➤ RATED CAPACITIES AND STACKING HEIGHTS

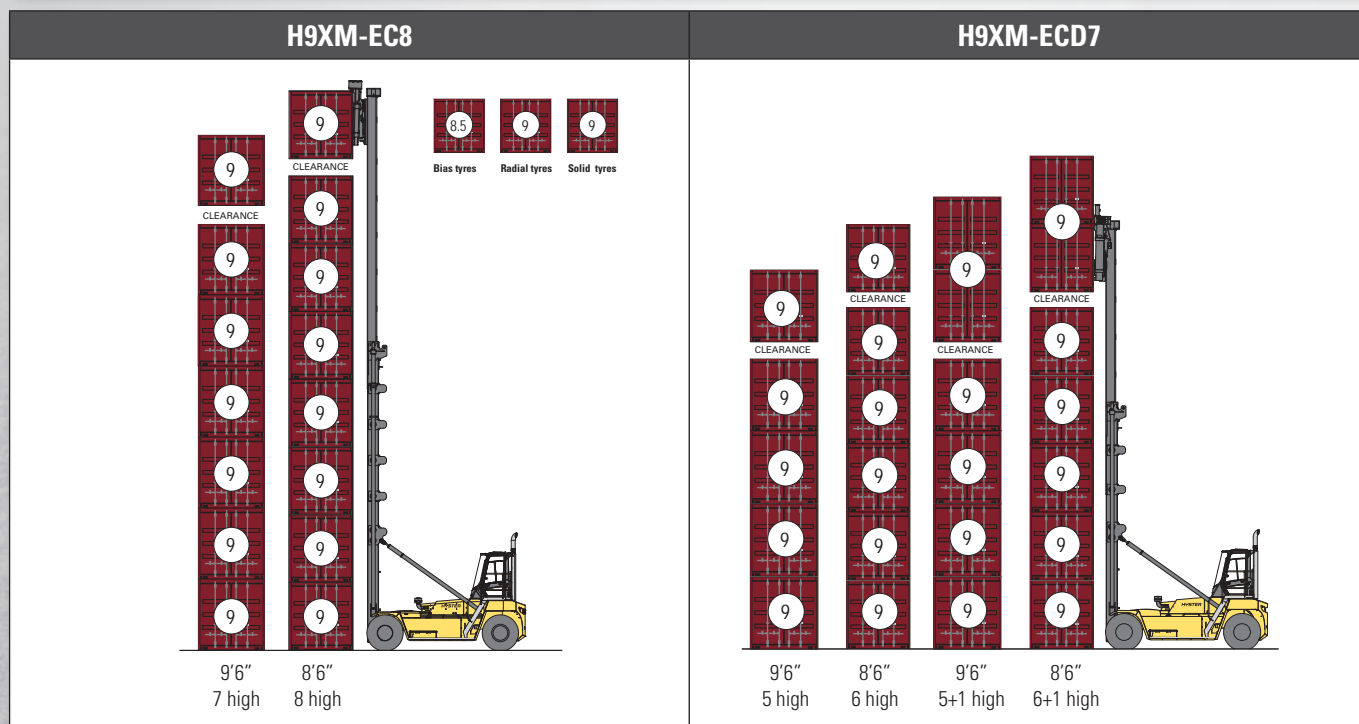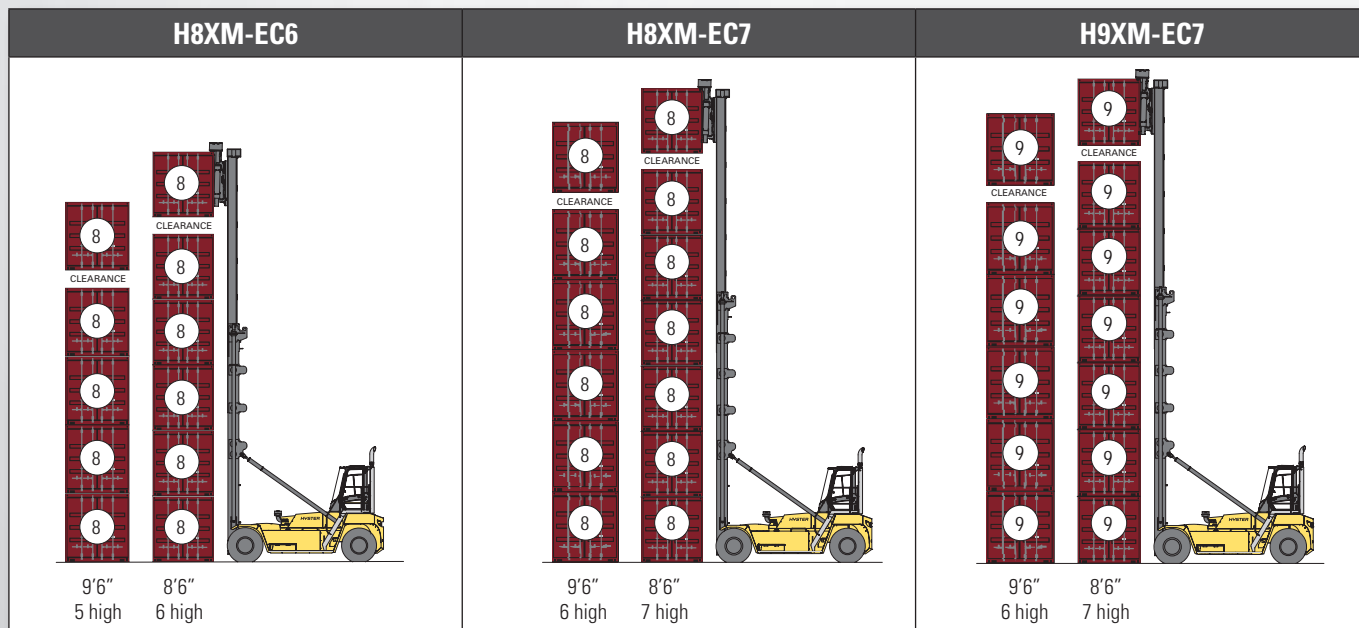

➤ SINGLE CONTAINER SPREADER

SINGLE CONTAINER SPREADER 588 TB	
	<p>Single handling container spreader Vertical Twistlocks.</p> <p>Suitable for:</p> <ul style="list-style-type: none"> • 20' or 40' ISO containers of 8' (2.44 m) width • Approx. 2.45-2.50 m wide "pallet-wide" 20' or 40' containers, with ISO-like 'chamfered' corner castings. • With speed limitation for laden/unladen. <p>Not suitable for:</p> <ul style="list-style-type: none"> • Approx. 2.45 - 2.60 m wide "CPC" containers (Cellular Pallet-wide Containers) with non-ISO corner castings. • Approx. 2.45 - 2.50 m wide "pallet-wide" 20' or 40' containers, with ISO-like 'chamfered' corner castings.

RATED CAPACITIES AND STACKING HEIGHTS

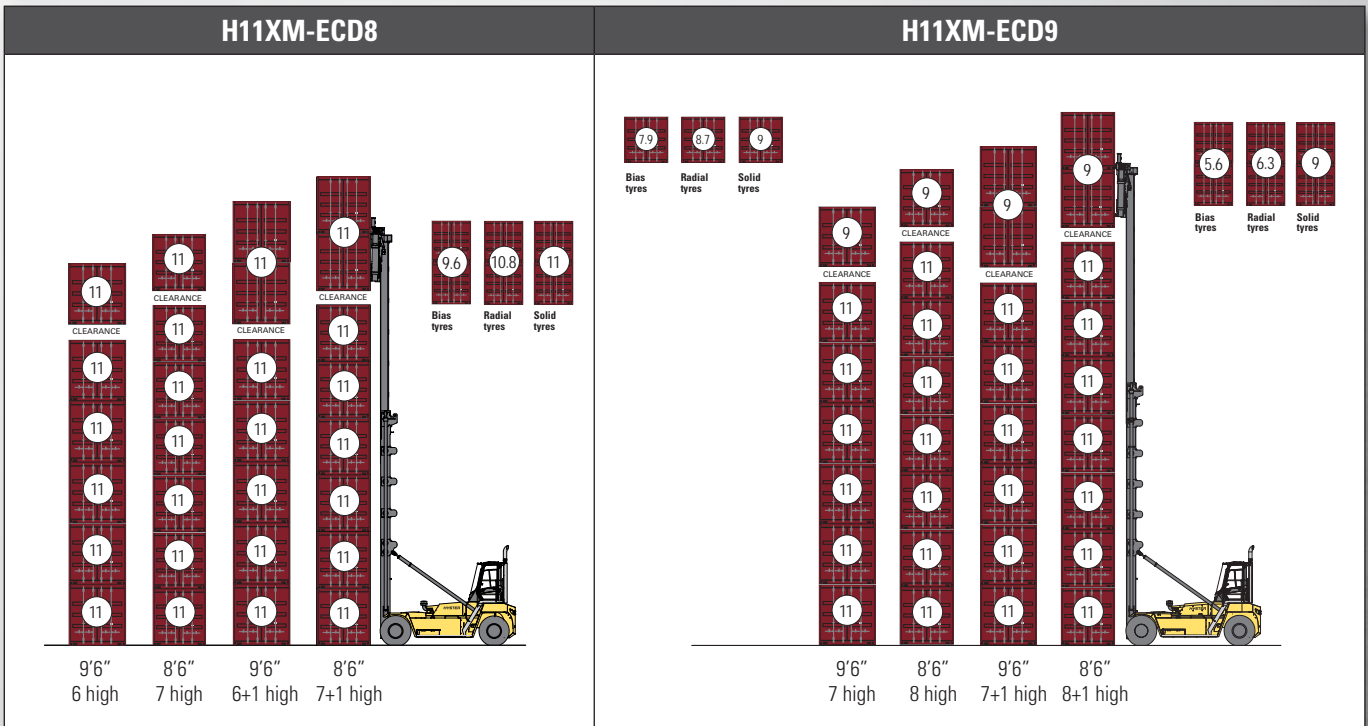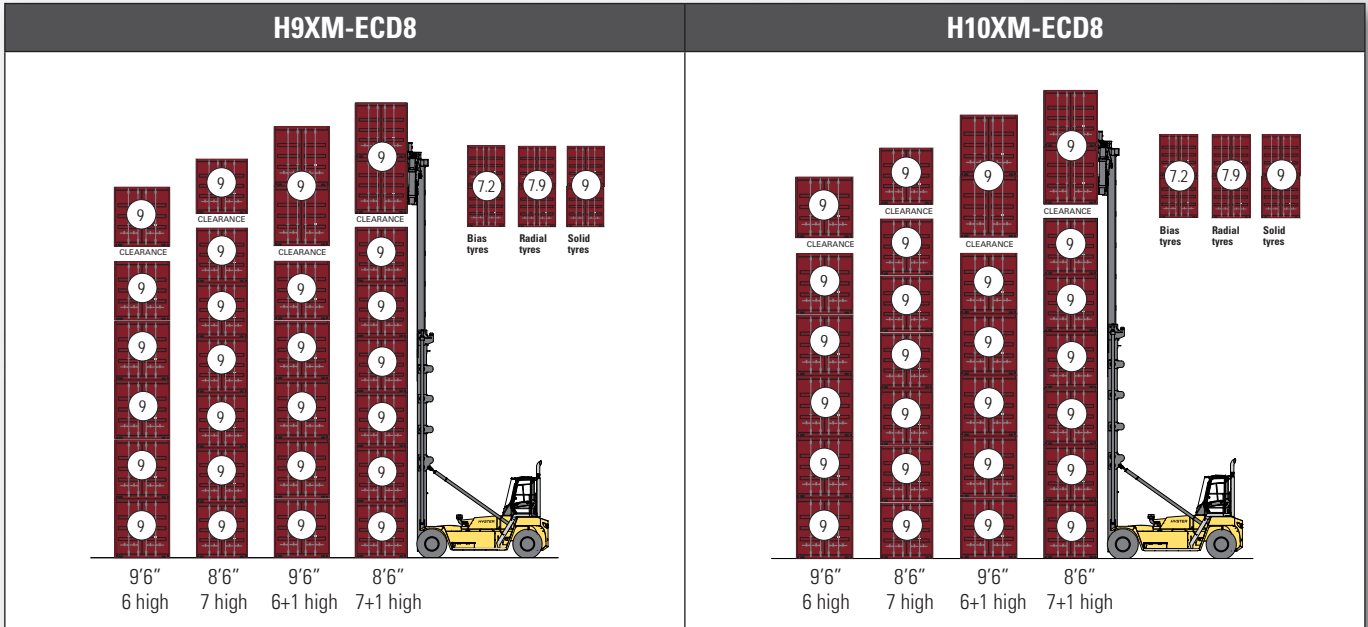

DOUBLE CONTAINER SPREADER




DOUBLE CONTAINER SPREADER 584 LD

Double handle container spreader.

- Picking container(s) at the front (hooks) and side (clamps) of the corner castings.
- With speed limitation for laden/unladen.
- With speed limitation for locked/un-locked.
- With first and second container presence sensing.

➤ OPTIONAL SPREADERS AND ENGAGEMENT SYSTEMS


SINGLE CONTAINER SPREADER 586 TB

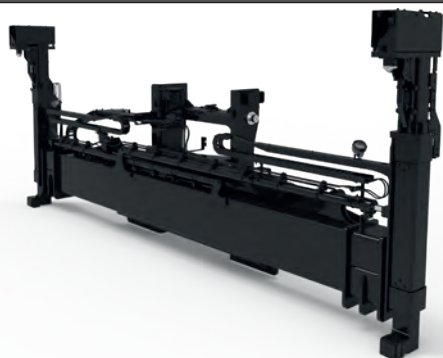

Single container handling spreader
Vertical Twistlocks
Removable "inset" container blocks
Suitable for:

- 20' or 40' ISO containers of 8' (2.44 m) width
- WTP (Wide Twistlock Position) containers
- Approx. 2.45-2.60 m wide "CPC" containers (Cellular Pallet-wide Containers) with non-ISO top corners castings.
- With speed limitation for laden/unladen.

SINGLE CONTAINER SPREADER 589 TB


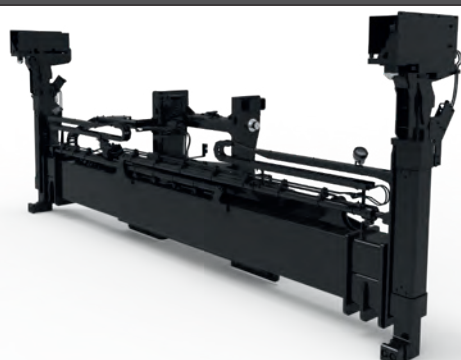


Single container handling spreader
Vertical Twistlocks
Forward Reach function on the twistlocks (100-176 mm)

- Suitable for:
- 20' or 40' ISO containers of 8' (2.44 m) width
 - Approx. 2.45-2.50 m wide "pallet-wide" 20' or 40' containers, with ISO-like 'chamfered' corner castings.
 - Approx. 2.45-2.60 m wide "CPC" containers (Cellular Pallet-wide Containers) with non-ISO top corners castings.
 - With speed limitation for laden/unladen.

Note: All single handler spreaders are equipped with mechanically action pile slope (MPS). Optional powered pile slope available (PPS).


DOUBLE CONTAINER SPREADER 582 LS

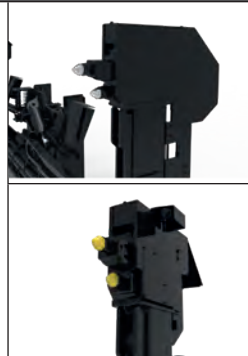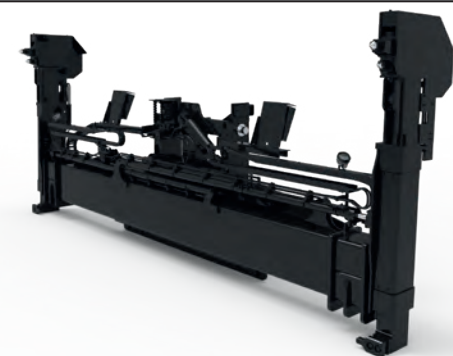

Double handle container spreader.

- Picking container(s) at the front of the corner castings (enabling block stacking)
- Top twistlock is extendable/retractable
- No speed limits without container
- Speed limiter 20km/h if one or two 20-40ft containers handling (laden)

DOUBLE CONTAINER SPREADER 584 LF

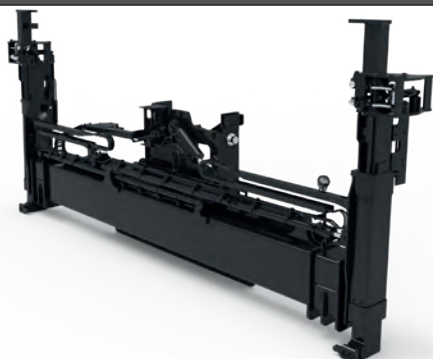

Double handle container spreader.

- Picking container(s) at the front (hooks) and side (clamps) of the corner castings
- One or two ISO and Binnen container(s) 20-40ft.
- One 45ft container in 40ft position
- Includes first and second container presence sensing (indicating laden or unladen status for bottom and top container separately)
- Includes fill-out pin and sensor to supplement hook, in order to ensure container engagement
- No speed limits without container
- Speed limiter 20km/h if one or two 20-40ft containers handling (laden)
- With 10km/h or 6mp/h speed limit if side hooks are open (un-locked)
- Speed limit 20 km/h with 45 ft container with fill-out pin

Note: All double handler spreaders are equipped with powered pile slope (PPS)

FEATURES AND OPTIONS



PERFORMANCE	STD	OPT
Cummins QSB 6.7 164 Diesel Engine delivering 164kW (rated) / 172kW (max) Stage IIIA, Variable geometry turbocharger, water cooled		x
Hibernate idle	x	
On-demand cooling fan	x	
120 amp alternator	x	
Powertrain protection system	x	
ZF Transmission 5WG211 5-spd fwd/3-spd reverse auto-shifting	x	
AxleTech Drive Axle PRC1756 W3H (162" / 4112 mm across drive tyres)	x	
Wide drive axle (171" / 4335 mm across drive tyres)	x	
DRIVE	STD	OPT
Traction speed limiter when carrying container (adjustable)	x	
Traction speed limiter - unconditional (adjustable)		x
Traction speed limiter when not in the carry position		x
Steer axle with full stroke steer cylinder for tight turning radius	x	
Steer axle with reduced stroke steer cylinder for longer tyre life		x
Premium pneumatic bias ply tyres	x	
Premium radial tyres		x
Premium pneumatic-shaped solid tyres		x
LIFT	STD	OPT
On-Demand Load Sensing Hydraulic System	x	
Automatic Throttle-up when lifting (in neutral or inching)	x	
Variable lap mast for low roller forces	x	
2 cylinder / 2 chain design	x	
Height sensor		x
Hydraulic system temperature protection		x
HANDLING	STD	OPT
Hyster Model 588TB single spreader	x	
Hyster Model 586TB single spreader, with removable blocks for ISO or wide containers		x
Hyster Model 589TB single spreader, with hydraulically adjustable head for ISO or wide containers		x
Hyster Model 584LD double spreader with hooks and side clamps	x	
Hyster Model 582LS double spreader with horizontal twistlocks		x
Hyster Model 584LF double spreader with hooks and side clamps and fill-out pin and sensor		x
Mechanical Pile Slope *	x	
Powered Pile Slope **	x	
Spreader automatic one-touch Extend/Retract (20'/40')		x
Mast Tilt Indicator - Mechanical		x
ERGONOMICS	STD	OPT
Raised Operator compartment (1000mm)		x
10 degree auto tip-up from 3-height or 10m		x
Isolated mounting for low noise and vibration	x	
Coat hook	x	
Front, top and rear wipers	x	
Front and rear window defrosters	x	
Left side handrails, stairway and cabin door	x	
Right side handrails, stairway and cabin door	x	
7" digital operator display	x	
Multifunction display panel	x	
Seat-side joystick hydraulic control	x	
Steering wheel spinner knob	x	
Directional control lever	x	
Interior wide angle mirrors	x	
Heater with 3 speed fan	x	
Telescoping & tilting steering column	x	
Recirculation fan		x
DC/DC converter 24 volt/12 volt with socket		x
2nd 12 volt socket		x
Accessory mounting post		x
Rear locking console in cab		x
Heated top window		x
"H"-pattern front wiper	x	
"I"-pattern front wiper		x
Air conditioning		x

Sun shades on top and rear		x
Radio preparation set-up - wiring, speakers, antenna		x
Reading light		x
Operator presence system	x	
Mechanical suspension seat	x	
Deluxe air suspension seat		x
Low backrest seat	x	
High backrest seat		x
Cloth seat cover	x	
Vinyl seat cover		x
Seat heating		x
2-point red high visibility seatbelt	x	
3-point red high visibility seatbelt		x
VISIBILITY	STD	OPT
External wide angle mirrors mounted to front fenders	x	
Exterior mirrors mounted to cab		x
Rear view camera system		x
Halogen work lights	x	
High Performance LED work lights		x
LED twistlock indicator lights	x	
LED stop/tail/brake lights	x	
Turn signals, hazard & marker lights (LED)	x	
APPEARANCE	STD	OPT
Hyster yellow paint base truck	x	
Special paint base truck		x
OPERATION	STD	OPT
Electric air horn 112 dB	x	
Visible alarm – Amber strobe light	x	
Audible alarm – Reverse direction activated 82–102 dB(A), self-adjusting	x	
Forward motion alarm		x
Seatbelt interlock for engine start		x
Seatbelt indicator light on top of cab		x
Tyre pressure monitoring system		x
Lockable battery disconnect switch	x	
Battery jump start connector (NATO plug)		x
Adjustable automatic "Empty Seat" engine shutdown		x
Trainer seat		x
Non-locking fuel cap	x	
Lockable fuel cap		x
Fuel strainer in fuel cap		x
Hyster Tracker wireless asset management - Monitoring	x	
Hyster Tracker wireless asset management - Access / Verification		x
Auto greasing system for basic truck & outer mast		x
Auto greasing system for spreader		x
Centralized Greasing provision for mast upper chain sheaves		x
24 volt electrical system	x	
Engine block heater 230 volt		x
Steer wheel nut protection		*
Rear Mud Flaps		x
Manual Tilt Operator Compartment for Service Access	x	
Powered Tilt Operator Compartment for Service Access		x
SUPPLEMENTAL	STD	OPT
Operator's manual	x	
CE certification	x	


* All single handler spreaders are equipped with mechanically action pile slope (MPS). Optional powered pile slope available (PPS).

** All double handler spreaders are equipped with powered pile slope (PPS). Other options available through Special Products Engineering Department (SPED). Contact Hyster for details.



HYSTER[®] DEALERS

Contact your nearest Hyster[®] Dealership
by visiting www.hyster.com.au

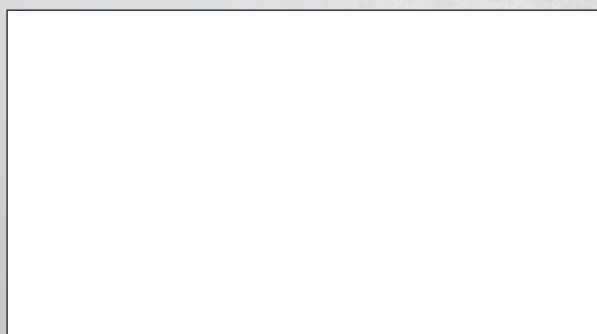

HYSTER PACIFIC

1 Bullecourt Avenue, Milperra NSW, Australia 2214
Tel: +61 (2) 9795 38007 Fax: +61 (2) 9792 8484
hyster.com/pacific/en-au

HYSTER ASIA

16 Tuas Avenue 20, Singapore 638827
Tel: +65 6863 3387 Fax: +65 6863 3349
hyster.com/asia/en-sg



/Hysterasiapacific



HysterJAPIC



Hyster Asia-Pacific